


## AL21CN-M

Munio outlet front grille



# Munio outlet front grille

# AL21CN-M

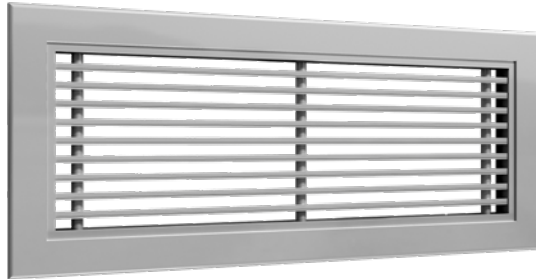

## Description

AL21CN-M is a rectangular aluminium grille with fixed horizontal 15° bended bars and additional vertical directional bars for regulation of distribution pattern. AL21CN-M is used as a outlet front grille for the Munio active chilled beam. It is supplied as a standard with springs for installation into the Munio telescope extension piece.

For more information please refer to "[Munio - Active Chilled Beam](#)".

## Maintenance


The grille can be removed easily to gain access to the Munio plenum. For full maintenance instruction please check [Munio installation instruction](#) ([www.lindQST.com](http://www.lindQST.com)).

The external parts of the grille should be wiped with a damp cloth.

## Ordering example

<b>Product</b>	<b>AL21CN-M</b>	<b>aaa</b>	<b>bbb</b>	<b>cccc</b>
Type				
L - measure				
H - measure				
<b>Grilles standard finish:</b>				
----	Anodized aluminium			
9010	RAL 9010, gloss 30			
9003	RAL 9003, gloss 30			
xxxx	On request, other RAL colour			

## Dimensions

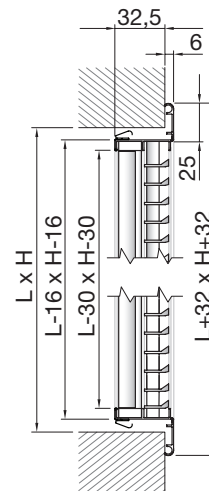

L x H mm	Free area m <sup>2</sup>	Weight kg
800 x 100	0,048	1,00
1000 x 100	0,060	1,40
1200 x 100	0,073	1,60
1400 x 100	0,085	1,90

## Materials and finish

Grille: Aluminium  
Standard finish: RAL 9003 or RAL 9010.

The grille is available in natural anodised finish and in other colours. Please contact Lindab's sales department for further information.