


# Verso CF 1700 U C5

Nominal air flow according to ErP 2018, m <sup>3</sup> /h	1416
Nominal air flow according to ErP 2018, l/s	393
Electric air heater capacity, kW / Δt, °C	4,5/8,0
Supply voltage HE, V	3~400
Supply voltage HW, V	1~230
Maximal operating current HE, A	13,3
Maximal operating current HW, A	7,1
Power supply cable E, mm <sup>2</sup>	5×2,5
Power supply cable W, mm <sup>2</sup>	3×1,5
Electric power input of the fan drive at maximum flow rate, W	465
Noise power level, L <sub>WA</sub> , dB(A)	57
Noise pressure level, L <sub>pA</sub> , dB(A), (3 m)	46
Filters dimensions B×H×L, mm	800×400×46
Unit dimensions B×H×L, mm	910×905×1810
Panel thickness, mm	50
Maintenance space, mm	800
Unit weight, kg	243



## Performance

Verso CF 1700 UH with standard equipment

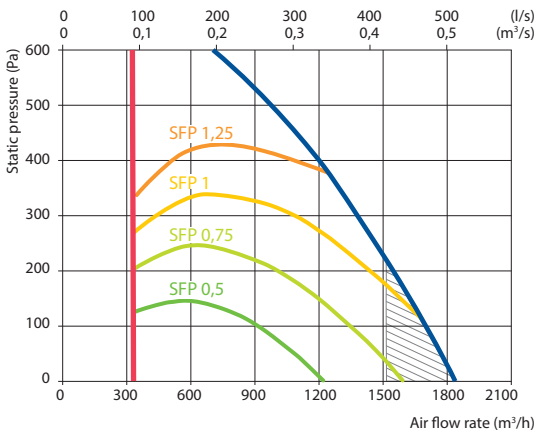

Does not conform to ErP2018 requirements

## Accessories

Closing damper	AGUJ-M-315+LF24/LM24
Silencer	ODA/EHA AGS-315-100-900-M
	SUP/ETA AGS-315-100-1200-M
PPU	PPU-HW-3R-15-1,6-W2
Water cooler	DCW-1,6-11
2-way valve	VVP47.20-4,0+SSF161.05HF
DX cooler	DCF-1,6-11
Cooling unit	MOU-36HFN8+KA8243

## Temperature efficiency


Outside temperature, °C	Winter					Summer		
	-23	-15	-10	-5	0	25	30	35
After heat exchanger, °C	14,4	15,3	16,2	16,6	17,6	22,6	23,6	24,7

Indoor +22 °C, 20 % RH


## Changeover water/ DX heating – cooling exchanger (HCW/HCDX)

	Winter		Summer	
	Winter	Summer	Winter	Summer
Water temperature in/out, °C	60/40	7/12	–	–
Condensation/evaporation T, °C	–	–	45	45/5
Capacity, kW	3,6	9,0	3,7	10,0
Maximal capacity, kW	11,4	11,0	6,5	12,1
Pressure drop, kPa	1	53,8	–	–
Air temperature in/out, °C	14,4 / 22	30 / 18	14,4 / 22	30 / 18
Connection, " / mm	½		¾ / 22	

## Shown as right (R1)

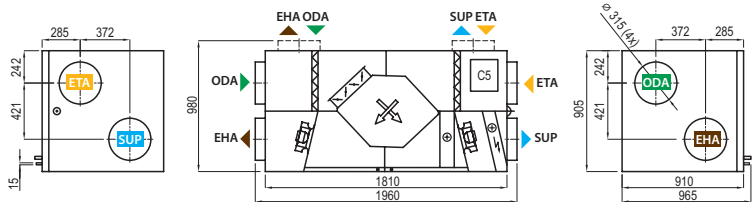

## Shown as left (L1)

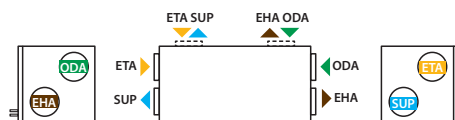

▶ ODA – outdoor intake    ▶ SUP – supply air    ▶ ETA – extract indoor    ▶ EHA – exhaust air